

# PRODUCT DATASHEET

**Model: L2T741 L3T741 L4T741**

Category: LED Tracklight

Description: 13w LED Tracklight with 1-10V dimming



## General Information

Material: Aluminium

Fitting Colors: White/ Black

Rotation Angle (degree): 350

Tilting Angle (degree): 60

Track System: Available in single wire, 3 wire, 3 phase

IP Rating: 20

Working Temperature (°C): -5 - +35

Storage Temperature (°C): -20 - +50



## Product Dimensions and Cut-out Information


Fitting Length (mm): 196

Diameter (mm): 52

Height (mm): Not Applicable

Cut-out Dimension (mm): Not Applicable

Dimension:

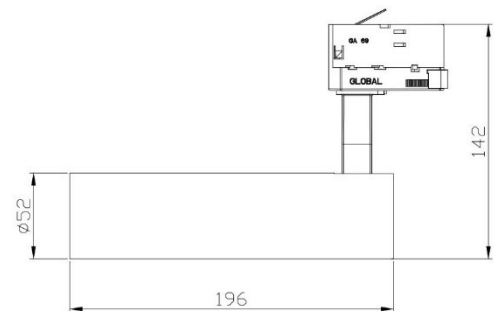

## Packing Information

Packaging Type: Individual box

Quantity per carton: 10

CBM per carton: 0.036

Gross weight per carton (kgs): 8

## Lifespan

Lifetime (hours): 30000

Luminous Flux after 50000hours (lm): LM80 Comply

# PRODUCT DATASHEET

**Model: L2T741 L3T741 L4T741**

Category: LED Tracklight

Description: 13w LED Tracklight with 1-10V dimming



## Light Technical Information

Color Temperature	CRI (Ra)	Gamut Index (GAI)	System Lumen	Lumen per Watt
2700	90	90	843	56
2700	95	100	788	53
3000	90	90	911	61
3000	95	100	829	55
3000 Vivid White	90	110	Not Applicable	Not Applicable
4000	90	90	972	65
4000	95	100	857	57
5000	80	90	1124	75
5000	90	90	952	63

LED Manufacturer: Luminus

LED Type: COB

LED Model: CXM-6 Gen 4

Optic: Reflector

Beam Angle (°): 17/24/36

## Electrical Information

System Power (w): 15

Input Voltage (v) & Frequency: 100-277V 50/60Hz

Output Voltage (v): 3-38

Current (mA): 350

1-10V Dimming: 06FLE15-RXY

Power Factor: 0.9

Efficiency (%): 87

Total Harmonic Distortion (%): <15

Ripple (%): Not Applicable

Dimmable: Triac Dimming – Upon Request

Dali Dimming – Upon Request