

PRODUCT DATASHEET

Model: LTB515 L3TB515 L4TB515

Category: LED Tracklight

Description: 62w LED Tracklight



General Information

Material: Aluminium

Fitting Colors: White/ Black/ Painted Silver

Rotation Angle (degree): 350

Tilting Angle (degree): 90°

Track System: Available in single wire, 3 wire, 3 phase

IP Rating: 20

Working Temperature (°C): -5 - +35

Storage Temperature (°C): -20 - +50



Product Dimensions and Cut-out Information


Fitting Length (mm): 205

Diameter (mm): 120

Height (mm): Not Applicable

Cut-out Dimension (mm): Not Applicable

Dimension:

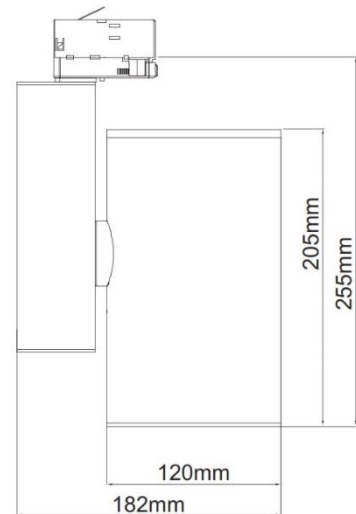

Packing Information

Packaging Type: Individual box

Quantity per carton: 4

CBM per carton: 0.038

Gross weight per carton (kgs): 11.5

Lifespan

Lifetime (hours): 50000

Luminous Flux after 50000hours (lm): LM80 Comply

PRODUCT DATASHEET

Model: LTB515 L3TB515 L4TB515

Category: LED Tracklight

Description: 62w LED Tracklight



Light Technical Information

Color Temperature	CRI (Ra)	Gamut Index (GAI)	System Lumen	Lumen per Watt
2700	90	90	5910	83
2700	95	100	5653	80
3000	90	90	6376	90
3000	95	100	5955	84
3000 Vivid White	90	110	6056	85
4000	95	100	6339	89
5000	80	90	7959	112
5000	90	90	6894	97

LED Manufacturer: Luminus

LED Type: COB

LED Model: CXM-22

Optic: Reflector

Beam Angle (°): 16/30/42

Electrical Information

System Power (w): 71

Input Voltage (v) & Frequency: 220-240V 50/60Hz

Output Voltage (v): 35.5-71.5

Current (mA): 1200

Non-Dimmable: LCI 100W 1400mA TEC C /87 500 267

Power Factor: 0.93

Efficiency (%): 90

Total Harmonic Distortion (%): <10

Ripple (%): <25

Dimmable: Triac Dimming – Upon Request

1-10V Dimming – Upon Request

Dali Dimming – Upon Request