


[MIRROR] _ LDL601

12w LED Downlight

RiO
LIGHT DYNAMIC

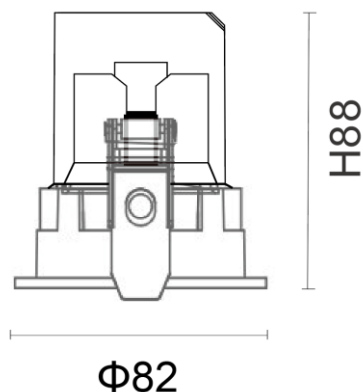

General Information

Housing Material:	Aluminium	Diffuser Material:	PC
Colour (RAL):	White(9016) - Black(9004)	Weight:	398g (Lamp)
Dimensions (L-W-H):	Dia.82mm – H88mm	Cut hole :	75mm
Connection:	AC Connector	Installation:	Recessed Mounted
Rotation Angle:	360°	Tilting Angle:	N/A
Temperature:	-20 ~ +35°C	Accessories:	N/A

Photometrical Data

LED Manufacturer:	Luminus	LED Type:	CXM-9
CCT:	2700K - 3000K - 4000K	CRI(Minimum):	90
lm system (±5%):	1322lm - 1380lm - 1451lm	lm source:	1508lm - 1573lm - 1654lm
Luminous Efficiency:	95lm/w - 100lm/w - 105lm/w	MacAdam:	3
Optic:	Lens	Beam Angle:	35° X 65°
UGR:	N/A	LifeSpan (Ta25°C):	>50.000h - L70B50

Electrical Data

Driver:	TRIDONIC	Input Voltage:	220-240VAC 50/60Hz
Output Voltage:	25-43VDC	Output Current:	350mA
Power Factor:	>0.55	SVM & Pstlm:	≤0.4 & ≤1
W system:	13.9W	Ballast Losses:	1.9W
Control:	ON/OFF	Minimum Dimming:	N/A
Inrush Current:	14.5A / 114μs	Max No. of Units	B10/13/16 = 32/41/50
		per MCB:	C10/13/16 = 52/67/85

[MIRROR] _ LDL601

12w LED Downlight



Installation Suggestion

