


[TRILBY] _ LDL924

12w LED Downlight

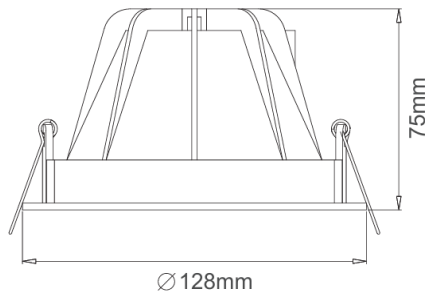

General Information

Housing Material:	Aluminium	Diffuser Material:	PC
Colour (RAL):	White(9016) - Black(9004)	Weight:	249g (Lamp)
Dimensions (L-W-H):	Dia.128mm – H75mm	Cuthole :	120mm
Connection:	AC Connector	Installation:	Recessed Mounted
Rotation Angle:	N/A	Tilting Angle:	N/A
Temperature:	-20 ~ +35°C	Accessories:	Glass

Photometrical Data

LED Manufacturer:	Luminus	LED Type:	CXM-9
CCT:	2700K - 3000K - 4000K	CRI(Minimum):	90
lm system (±5%):	1307lm - 1358lm - 1464lm	lm source:	1616lm - 1679lm - 1758lm
Luminous Efficiency:	91lm/w – 95lm/w – 101lm/w	MacAdam:	3
Optic:	Lens + Anti-glare Cover	Beam Angle:	36°/50°/60°
UGR:	<19	LifeSpan (Ta25°C):	>50.000h - L70B50

Electrical Data

Driver:	TRIDONIC	Input Voltage:	220-240VAC 50/60Hz
Output Voltage:	25-43VDC	Output Current:	350mA
Power Factor:	>0.55	Ripple:	±5%
W system:	14.4W	Ballast Losses:	2.1W
Control:	ON/OFF	Minimum Dimming:	N/A
Inrush Current:	14.5A / 114µs	Max No. of Units	B10/13/16 = 32/41/50
		per MCB:	C10/13/16 = 52/67/85

[TRILBY] _ LDL924

12w LED Downlight



Accessories

Anti-glare Cover Color		
		
Matt White	Chrome	Matt Chrome
		
Polished Gold	Matt Black	Matt Nickel